



**MITSUBISHI
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better



Brightness
2100lm



XD420U

MOBILE XGA PROJECTOR

The latest word, in projector practical.
Easy on, instant off.

*Instant
Shut down*






XD420U

MOBILE XGA PROJECTOR

Input and Output Terminals

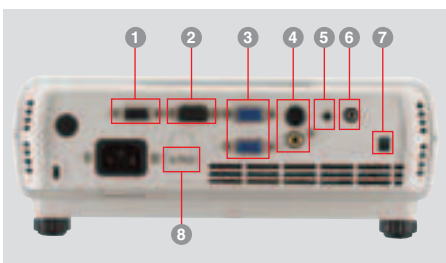


- 1 PC / Component Video output
- 2 Serial RS-232C
- 3 PC / Component Video input (mini D-sub 15pin)
- 4 S-Video / RCA
- 5 Audio input
- 6 Audio output
- 7 DC Out
- 8 Security Hook

Specifications

Model	XD420U
Display technology	0.55"1-Chip DMD, 12deg. DDR, DDP2000
Resolution	1024×768 (total 786,432 pixels), 550 Video lines
Brightness	2100lm
Contrast	2000 : 1 (on/off)
Picture Size	40"~300"(100"=3.2m)
Source lamp	184W (Shut Off Time 4000Hrs) with Low Mode 230W (Shut Off Time 2000Hrs)
Computer compatibility	640×480 ~1280×1024 True: 1024×768, Sync on green available
Video compatibility	NTSC/NTSC4.43/PAL(including PAL-M, N)/SECAM/PAL-60, Component Video: 480i/p(525i/p), 576i/p(625i/p), 720p(750p), 1080i(1125i 60Hz), 1080i(1125i 50Hz)
PC input terminals	mini D-sub 15pin×2
Video input terminals	Video: RCA×1+S-video×1, Audio: stereo mini jack(ø3.5)×1
Output terminals	RGB: mini D-sub 15pin×1, DC Out: 5V 1.5A(MAX) Audio: stereo mini jack(ø3.5)×1
Communication terminals	RS-232C(D-sub 9pin)×1
Audio speaker	2W mono
Dimension(W×H×D)	261×87×265mm(excluding height adjustment)
Weight	2.6kg/5.7lbs
Power supply	AC100 - 240V, 50/60Hz
Optional lamp	VLT-XD420LP

*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.


Dimensions

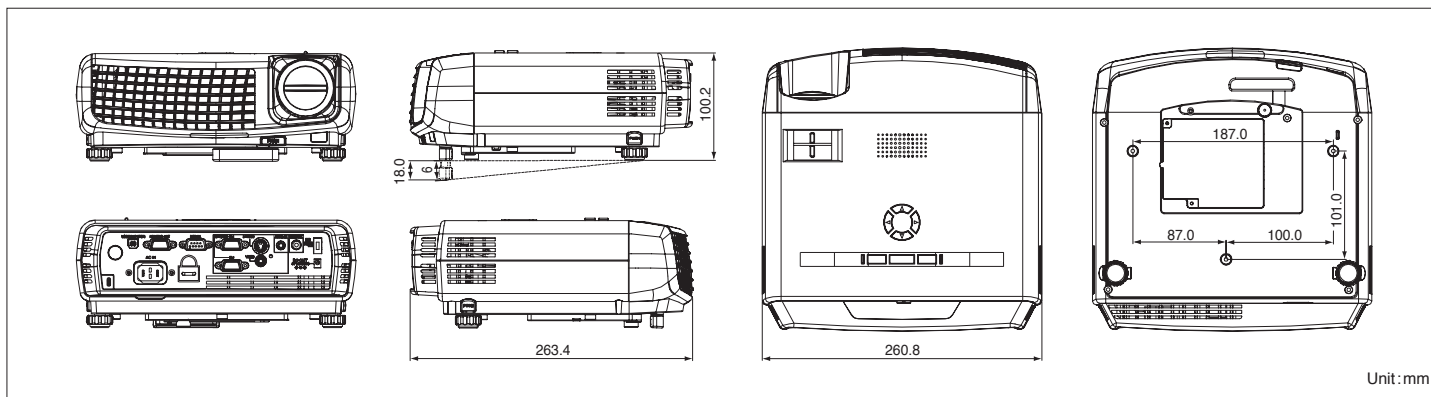

Unit : mm

Screen size and Projection distance

As seen from the side

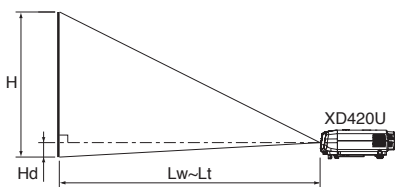

Screen size chart

Screen (4:3 aspect ratio)						Distance from screen (L)				Height projected image (Hd)		Screen (16:9 aspect ratio)						Distance from screen (L)				Height projected image (Hd)			
Diagonal size	Width (W)		Height (H)		Maximum Zoom		Minimum Zoom		inch	cm	inch	cm	Diagonal size	Width (W)		Height (H)		Maximum Zoom		Minimum Zoom		inch	cm	inch	cm
40	102	32	81	24	61	50	1.3	60	1.5	3.5	8.8	40	102	34.9	89	19.6	50	55	1.4	66	1.7	6.7	17.1		
60	152	48	122	36	91	76	1.9	91	2.3	5.2	13.3	60	152	52.3	133	29.4	75	82	2.1	99	2.5	10.1	25.7		
80	203	64	163	48	122	101	2.6	121	3.1	7.0	17.7	80	203	69.7	177	39.2	100	110	2.8	132	3.3	13.5	34.3		
100	254	80	203	60	152	126	3.2	151	3.8	8.7	22.1	100	254	87.2	221	49.0	125	137	3.5	165	4.2	16.9	42.9		
150	381	120	305	90	229	189	4.8	227	5.8	13.1	33.2	150	381	130.7	332	73.5	187	206	5.2	247	6.3	25.3	64.3		
200	508	160	406	120	305	252	6.4	302	7.7	17.4	44.2	200	508	174.3	443	98.1	249	275	7.0	329	8.4	33.7	85.7		
250	635	200	508	150	381	315	8.0	378	9.6	21.8	55.3	250	635	217.9	553	122.6	311	343	8.7	412	10.5	42.2	107.1		
300	762	240	610	180	457	378	9.6	-	-	26.1	66.3	300	762	261.5	664	147.1	374	412	10.5	-	-	50.6	128.6		

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI ELECTRIC EUROPE (BENELUX Office)

Nijverheidsweg 23A, 3641 RP Mijdrecht - The Netherlands
Tel: +31 (0)297-282461 Fax: +31 (0)297-283936 - www.MitsubishiElectric.nl